


## NEW IGLOO C 80ST

Item number: 1471032

Pivotal straight door in clear glass with grip-friendly handle. When the shower is not in use, the door can be turned inwards to gain space. The shower door is stable with a wall profile in anodised aluminum. The door has lifting hinges so that it does not touch the floor when opening. 6 mm toughened safety glass. Height 2000 mm. Can be installed with surface-mounted pipes, 35 mm. 12 mm door seal, magnetic strip and handle included.

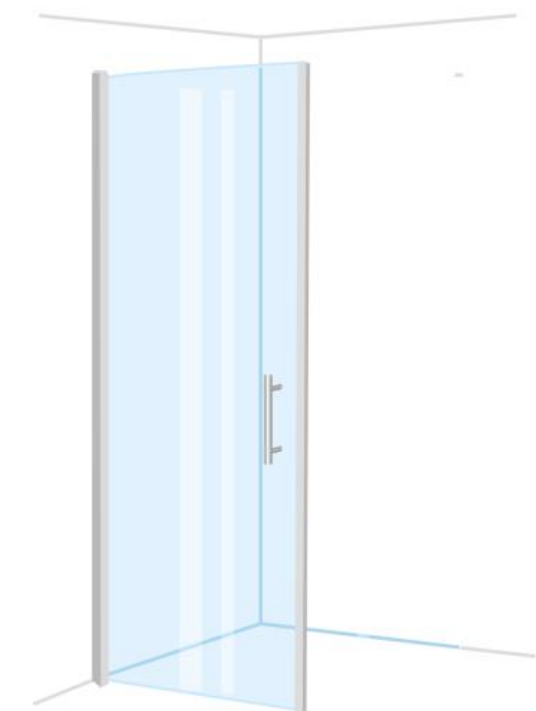

### DETAILED INFORMATION

Item number		Material and surface treatment	
NOBB	40793754	Main material	Safety glass, Aluminum
EAN	7330027017594	Surface treatment	Anodized
Stocked article	Yes	Glass	Clear glass
Standards and classifications		Packaging dimensions and weight	
EN standard	EN14428	Package width (m)	1,200
Sunda Hus	Yes	Package height(m)	0,050
CE marked	Yes	Package depth(m)	2,000
ETIM	EC010962	Package weight(kg)	23,000
Product dimensions and weight			
Height (mm)	2000		
Width	800		
Glass thickness (mm)	6		
Hinge lift height (mm)	5		
Floor gap max. (mm)	11		
Net weight (kg)	23		

### CARE INSTRUCTIONS

To facilitate the cleaning of shower doors and shower walls, the showers have large smooth surfaces and profiles without deep grooves. Discolouration is removed using citric or tartaric acid, rinse thoroughly afterwards. Limescale stains are removed using household vinegar warmed to 50 degrees: Rub it in, let it act, rinse away. Repeat for tough stains. Use rubbing alcohol to remove grease stains.